


SHIELD CONDUCTOR CONTACT

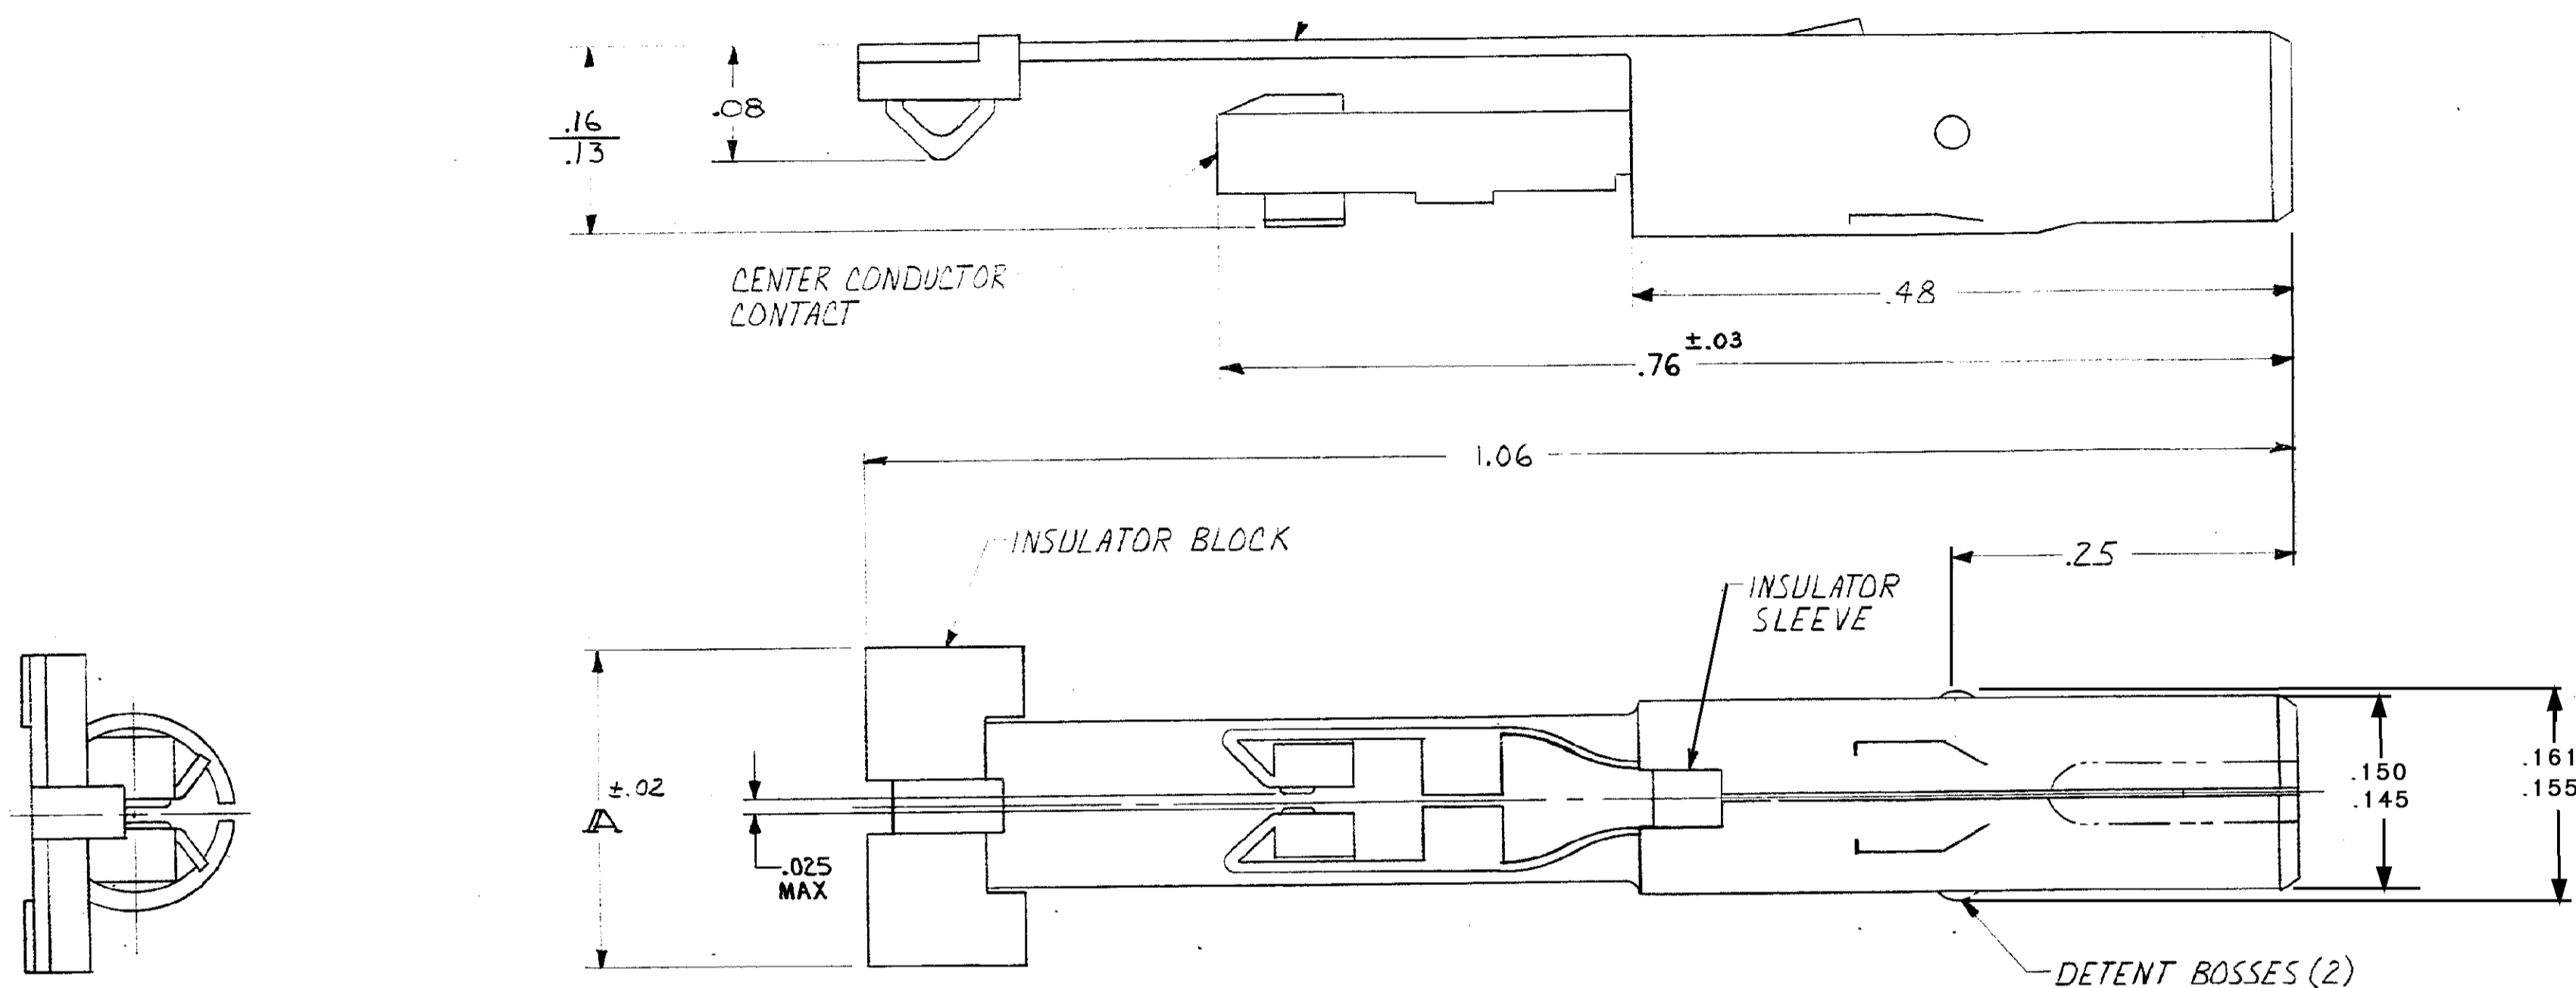

1. INSULATOR BLOCK IS ABS PER MIL-M-22544.
INSULATOR SLEEVE IS POLYCARBONATE PER MIL. SPEC. L-P-393.
2. CENTER CONDUCTOR CONTACT IS PER AMP P/N 422353-2.
3. SHIELD CONDUCTOR CONTACT IS BERYLLIUM COPPER,
PLATED WITH .000030 GOLD OVER .000050 NICKEL.
4. THIS ASSEMBLY MATES WITH RECEPTACLES IN AMP P/N 425475-3.

1-422972-3	.200	GRAY	MICD
1-422972-1	.240	BLACK	COAXIAL
PART NO.	A	INSULATOR BLOCK COLOR	SYSTEM TYPE

REQUIRED PER ASSEMBLY		DWG SIZE	NUMBER	NAME	REMARKS	ITEM NO.
		MATERIAL	HEAT TREAT		COATING OR PLATING	
		WIRE RANGE	UNLESS OTHERWISE SPECIFIED REMOVE BLURS, BREAK SHARP EDGES .015 R MAX DECIMALS: .00 ± .02, .000 ± .005, .0000 ± .0005 ANGLES: ±0° 30'			
		CLASS	TYPE REMOVABLE CONTACT		AMP INCORPORATED HARRISBURG, PENNA.	
		DR	3-11-71	FIRST USED	AMP	
		CHK	3-15-71	P.P.P.	LOC S	NO. 422972
		SCALE	NAME		REV F	
		10:1 REAR RECEPTACLE SUB-ASSY				

ECO-08-014134	PY	DE	10-08
REVISED	ECN S3146		
REVISION RECORD			
DESCRIPTION			

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.
 AMP 1256 REV 9/66